


# Flat Gripper Magnets

## with threaded bush / with cylindrical grip, rubber coated

These systems are used especially on delicate surfaces. Due to the rubber coating occur neither scratches nor discoloration. Moreover the slip resistance is improved thanks to rubber coating.

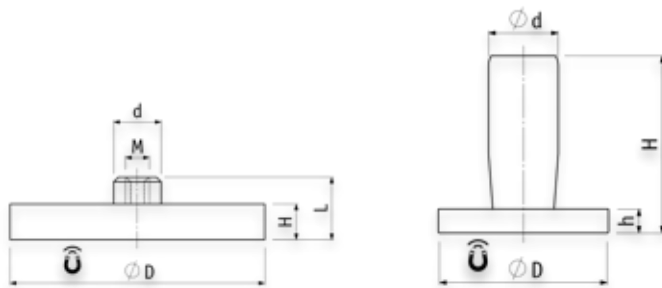

with cylindrical grip

### Features

- ☑ Material Neodymium
- ☑ Max. admissible temperature 60°C or 80°C
- ☑ With threaded bush | with cylindrical grip

### Technical data

	Dimensions [mm]				Thread	Adhesive force [N]	Shear force [N]	Temperature [°C]	Weight [g]	No.
	D	d	H	L						
<b>with threaded bush</b>	12	8	7	14,5	M4	13	5	60	6,0	
	18	8	6	11,5	M4	37	13	60	8,7	
	22	8	6	11,5	M4	58	18	60	13,0	72631
	31	8	6	11,5	M4	89	25	60	22,0	73381
	31	8	6	11,5	M4	89	35	60	23,0	
	43	8	6	10,5	M4	100	38	60	30,0	27215
	43	8	6	10,5	M5	100	38	60	31,0	
	57	10	7,6	14,5	M5	200	78	80	82,0	
	66	10	8,5	15,0	M5	250	85	80	105,0	39391
	88	12	8,5	17,0	M8	550	140	80	192,0	39392
<b>with cylindrical grip</b>	Dimensions [mm]				Adhesive force [N]	Temperature [°C]	Weight [g]	No.		
	D	d	H	L						
	43	18	45	6	100	60	43	73382		