

Accessories suitable for

Speedy Prisma 210-P | 210-PSL



Milling cutters



Field of application	Description	No.
Steel	Ø 6 mm, Z = 3, point angle 180°, both sides, uncoated	17516
Steel, stainless steel	Ø 6 mm, Z = 3, point angle 180°, both sides, coated	53675
Steel, stainless steel	Ø 10 mm, S 6 mm, Z = 6, spiral toothed, ER 0,4, point angle 180°, one-side, coated	15196
Alu, Plastic	Ø 10 mm, S 6 mm, Z = 4, spiral toothed, point angle 180°, one-side, uncoated	15195
Steel > 40 HRC, HSS	CBN cup grinding wheel	62273
Hard metal	diamond cup grinding wheel	62272



* Explanation of abbreviations: GP = guide pin, GBB = guide ball bearing, S = shaft diameter, Z = number of teeth

Spare parts




	Details	No.
Belt	propulsion	51239
Exhaust device	Ø 32 mm	54131
Wet/dry vacuum cleaner	ATTIX33-2L IC	65857

FS 5



Chamfer insert milling cutters

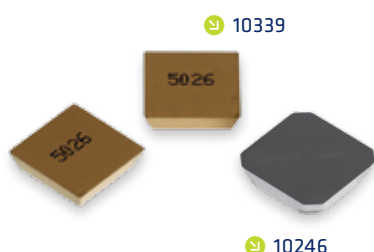

Field of application	Description	No.
Steel, stainless steel	SE12	40695
Stainless steel	SE12 TiN coated	10339
Alu, plastic	SE12 alu polished	10246
Screw fat	tube with 14g	32202